

IMPORTANT INSTRUCTIONS

For Installation LSTE6



MODELS	LSTE6 CEILING MOUNT ONLY	
	Primary 240V 50-60Hz	
	Secondary 11.5V 20-35VA	
	IP67 RATED	

A.C.N. 010 572 773


CAUTION - SEE WARNINGS OVER

Note: To achieve IP67 rating, use round cable (size 5-10mm) to suit entry gland supplied with fixture.


WARNING: DO NOT USE POWER TOOLS TO ASSEMBLE OR FASTEN.




For safety, this product must be used in conjunction with an approved earth leakage protection device.




1
Mark and drill/cast holes. Refer drawing over. Mark locations of fixtures. Run cables.




2
For IP67 installation: Fit gland. (Supplied with light fixture) to transformer enclosure. Ensure gland is firmly tightened and sealing area is free from debris. Check only round supply cable and oring is seated correctly. Use ensure that gland seals on outer insulation.




3
Terminate supply cable in transformer enclosure and tighten cable gland onto cable.
Note: Ensure only round supply cable is used and cable gland seals on the outer insulation.




4
Screw transformer enclosure to mounting surface by hand - Do not use power tools to prevent oring damage. Use screws and orings supplied with fixture - failure to use o-rings will cause fixture to leak.

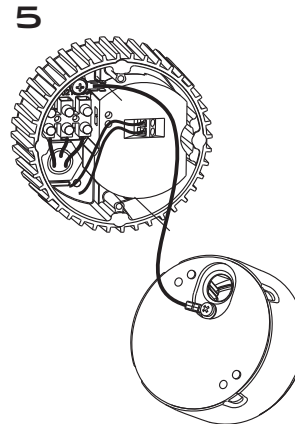

5
Attach earth to fixture with pan head screw and spring washer supplied.



6
See fixture instruction sheet step 2 for lid/reflector removal.
Attach fixture body to LSTE6 with machine screws ensuring that leads from the transformer run into the body and are not pinched between transformer and the body.



7
Terminate the low voltage leads, insert lamp, test and assemble fixture as per fixture installation instructions steps 4-6.

SEE OVER FOR FULL SIZE TEMPLATE



LUMASCAPE
LUMASCAPE LIGHTING INDUSTRIES PTY LTD

Head Office and Factory
38-44 Enterprise Street, Cleveland,
QLD Australia 4163
PO Box 1875, Cleveland D.C.,
QLD Australia 4163
Tel 07 3286 2299 Fax 07 3286 6599

International
Telephone 61 7 3286 2299
Fax 61 7 3286 6599

New South Wales
Tel (02) 9519 6860 Fax (02) 9519 8834

Victoria
Tel (03) 9686 1900 Fax (03) 9686 1700



www.lumascape.com.au

ABN: 21 010 572 773

IMPORTANT INSTRUCTIONS

Dimensional Details LSTE6

B

MODELS	LSTE6 CEILING MOUNT ONLY	 
	Primary 240V 50-60Hz	
	Secondary 11.5V 20-35VA	
	IP67 RATED	

IMPORTANT SAFETY INSTRUCTIONS

INSTRUCTIONS PERTAINING TO A RISK OF FIRE, OR INJURY TO PERSONS

WARNING - To reduce the risk of FIRE or INJURY:

1. Ceiling mount only
2. Fixtures can become very hot. Use discretion in placement.
3. Turn Off and allow to cool before replacing lamp.
4. Lamp gets hot quickly! Contact only switch/plug when turning on.
5. Do not touch hot lens, guard, or enclosure.
6. Keep lamp away from materials that may burn.
7. Do not touch the lamp at any time. Use a soft cloth. Oil from skin may damage lamp.
8. Do not operate the lighting fixture with a missing or damaged shield.

SAVE THESE INSTRUCTIONS.



LUMASCAPE

LUMASCAPE LIGHTING INDUSTRIES PTY LTD

Head Office and Factory
 38-44 Enterprise Street, Cleveland,
 QLD Australia 4163
 PO Box 1875, Cleveland D.C.,
 QLD Australia 4163
 Tel 07 3286 2299 Fax 07 3286 6599

International
 Telephone 61 7 3286 2299
 Fax 61 7 3286 6599

New South Wales
 Tel (02) 9519 6860 Fax (02) 9519 8834

Victoria
 Tel (03) 9686 1900 Fax (03) 9686 1700

www.lumascape.com.au

ABN: 21 010 572 773

Mounting Template, 1:1

