VESTALUX V2
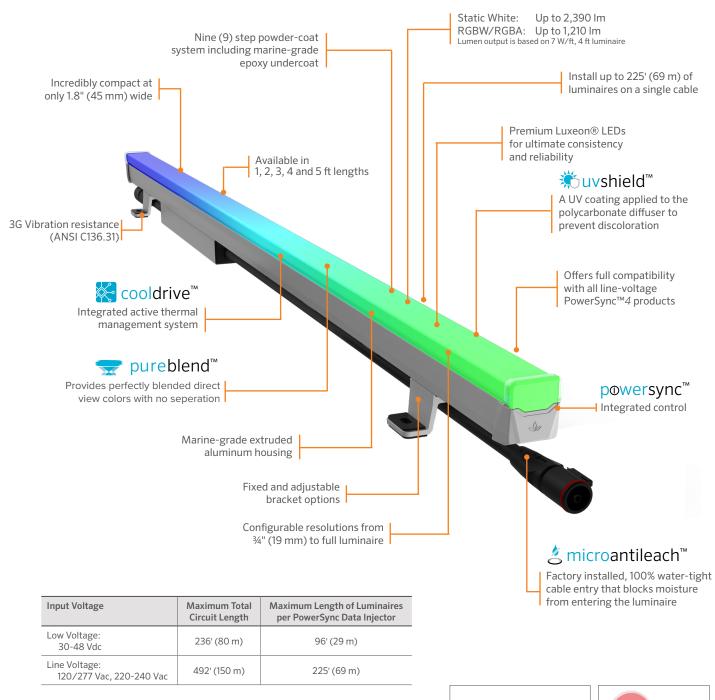
A compact, high-performance direct view that combines technology and performance in a stylish design

Nine (9) step powder-coat system including marine-grade epoxy undercoat

Incredibly compact at only 1.8" (45 mm) wide

Available in 1, 2, 3, 4 and 5 ft lengths

3G Vibration resistance (ANSI C136.31)

Static White: Up to 2,390 lm
RGBW/RGBA: Up to 1,210 lm
Lumen output is based on 7 W/ft, 4 ft luminaire

Install up to 225' (69 m) of luminaires on a single cable

Premium Luxeon® LEDs for ultimate consistency and reliability

uvshield™
A UV coating applied to the polycarbonate diffuser to prevent discoloration

Offers full compatibility with all line-voltage PowerSync™4 products

cooldrive™
Integrated active thermal management system

pureblend™
Provides perfectly blended direct view colors with no seperation

powersync™
Integrated control

Marine-grade extruded aluminum housing

Fixed and adjustable bracket options

Configurable resolutions from ¾" (19 mm) to full luminaire

microantileach™
Factory installed, 100% water-tight cable entry that blocks moisture from entering the luminaire

Input Voltage	Maximum Total Circuit Length	Maximum Length of Luminaires per PowerSync Data Injector
Low Voltage: 30-48 Vdc	236' (80 m)	96' (29 m)
Line Voltage: 120/277 Vac, 220-240 Vac	492' (150 m)	225' (69 m)

Available in RGBW, RGBA, Tunable White and a wide selection of white color temperatures.

Adjustable   Fixed

Mounting Options

Round   Square

Optical Types

ARCHITECTURAL & FACADE LIGHTING
Learn more. Visit lumascape.com

LUMASCAPE

PRODUCT-FLYER_LS9016-220225